

Hydraulic Top Link Cylinder

For Linear Motion - Lift, Tilt ...
Powerful Performance, Efficient use of Space



탑링크 실린더 사용 시, 보다 쉽게 어태치먼트 장착
캐빈에서 직접 조정 가능, 생산성 향상
트랙터 마력별로 구성된 다양한 카테고리, 작업 효율 향상

The attachment can be installed more easily by using the top link cylinder.
It can be adjusted directly in the cabin, which can help increase productivity.
It is composed of various Categories by tractor horsepower,
so it can increase work efficiency.

Tractor HP less than 20 = Category 0 top link
Tractor HP 20 to 55 = Category 1 top link
Tractor HP 45 to 95 = Category 2 top link
Tractor HP greater than 95 = Category 3 top link


Hydraulic Top Link Cylinder

동진정공의 강점

Top Link Cylinder는 양방향 체크 기능품이 실린더 내부에 조립되어 있어, 외부누유 발생을 줄일수 있고, 외부 충격에 강한 구조임.

Dongjin' s Top Link Cylinder' s Strengths

Double check valve is mounted inside the Cylinder.
It has the effect of reducing the occurrence of external leakage and is strong against external shocks.

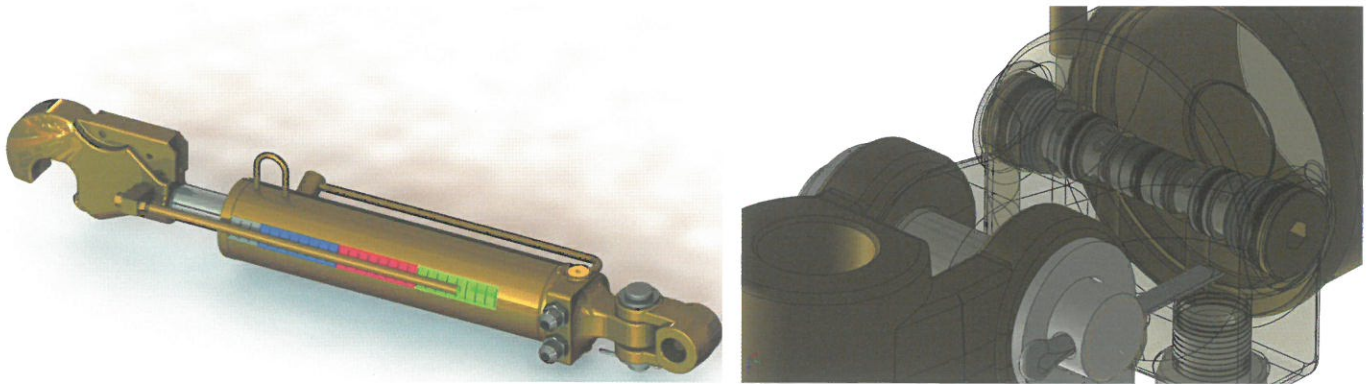

General Specification

Tractor power : 65HP
Swivel bolt : 25 mm
Category : 2rd
Stroke : 230 mm
Diameter rod : 35 mm
Diameter cylinder : 75 mm
Distance closed : 600 mm
Distance swivel to cylinder : 48 mm
Length of hoses : 850mm



Check Point !

기존 제품의 단점

- 공간 : 외부에 장착된 노출형 체크밸브 블록
- 내구성 : 외부 누유 취약,
외부 충격에 의한 쉬운 파손 및 변형

Disadvantages of existing products

- Space: Check valve block installed outside
- Durability: Possibility of external leakage,
Easy breakage due to external impact Light deformation

